

STYLVENT

WALL / WINDOW MOUNTED FANS

Automatic, soft acting motorised shutters prevent wind sheer and fan failure.

5*
YEAR WARRANTY

EURO
MADE

IPX4

The Styuvent Series can be wall or window mounted making them suitable for a wide range of general residential and commercial exhaust or supply ventilation applications.

- Weather and impact resistant housing.
- Rated “Continuous Run”.
- Exhaust mode is standard. Can be direct wired in supply air mode or dual mode with reversing switch. (HV-230AE & HV-300AE only).
- Easy to clean removable cover.

ACCESSORIES

- Reversing switch
- Weather cap
- Wall rods, tubes and plates for wall mounting (see page 78).


SPECIFICATIONS

MODEL NO.	M ³ /HR [†]	L/SEC [†]	FAN SPEED RPM	AVG. dB(A) @ 3M	WATTS	VOLTS	IP RATING
HV-150AE	225	63	1800	39	32	220-240	IPX4
HV-230AE	600	167	1250	43	34	230-240	IPX4
HV-300AE	1100	306	1150	46	68	230-240	IPX4

[†] Air flow in exhaust mode

*Conditions apply. For details visit: fantechtrade.com.au/warranty

DIMENSIONS

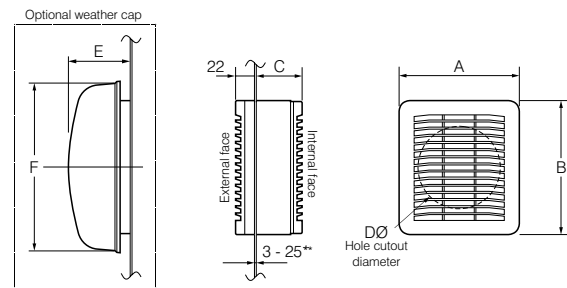

MODEL NO.	A	B	C	DØ MIN	DØ MAX	E	F
HV-150AE	230	251	110	185	190	130	306
HV-230AE	300	325	142	259	262	182	440
HV-300AE	368	403	150	327	330	215	570

** For walls 25mm to 300mm thick use wall rods

All dimensions in mm

OPTIONAL WEATHER CAP

The Weather Cap provides added protection against both wind and rain when the fan is mounted horizontal or in demanding areas such as high-rise housing, seaside and exposed positions. It also comes with bird wire mesh and is colour matched to the fan. Model No's: HV-150CAP, HV-230CAP, HV-300CAP.

