



# MINIVENT

## ROOF MOUNTED FANS




The Minivent Series of axial roof units has been designed for use in a wide range of free intake or duct mounted, domestic and commercial applications. They can be speed controlled and are available in 6 sizes ranging from 112 to 350mm diameter.

- Robust, lightweight construction.
- Wide choice of speeds for most sizes.
- All motors are speed controllable.
- Can be used in ducted systems.
- Can be mounted at angles up to 30°.
- Backdraft shutters can be fitted to fans 250 to 350mm diameter.
- Single phase, 240V only.

## ACCESSORIES

- Run-on Timers & Speed Controllers.
- Flexible Duct - Fire Rated AS/NZS 4254.
- A range of upstands are available. For information on suitable upstands contact your local Fantech Trade branch.

## DIMENSIONS

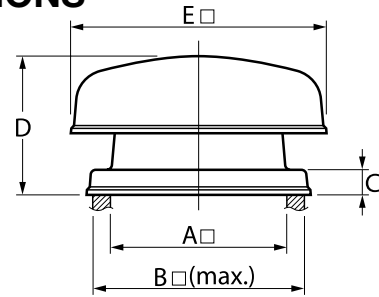

MODEL NO.	A □	B □	C	D	E □	WEIGHT KG
MV112E						1.3
MV132E	210	260	30	200	310	1.9
MV202E						4.6
MV204E						4.5
MV252E	350	410	55	350	570	5.9
MV254E						6.1
MV302E						6.9
MV304E	350	410	55	350	570	6.5
MV306E						6.5
MV354E						8.5
MV356E	400	500	95	380	670	8.5

All dimensions in mm

## SPECIFICATIONS

MODEL NO. MV...	M <sup>3</sup> /HR	L/SEC	FAN SPEED REV/SEC	AVG. dB(A) @ 3M	SINGLE PHASE WATTS	AMPS*	MAX. °C
112	122	34	44	33	22	0.11	50
132	270	75	46	43	46	0.25	50
202	688	191	43	52	70	0.36	50
204	299	83	24	38	30	0.14	60
252	1274	354	42	51	110	0.63	50
254	785	218	23	42	60	0.18	60
302	2066	574	41	55	180	0.79	50
304	1303	362	22	44	90	0.41	50
306	882	245	16	39	50	0.23	50
354	1901	528	20	50	140	0.68	50
356	1472	409	16	45	110	0.48	50

\*Amperages shown are a guide only.

Refer to our Sales Department for accurate figures at time of order.

