



DIGI-LUMEN HALO LED

Built-in Driver
Durable and reliable power source,
all in one design.

Manual Dimmer
200/400/600/800/1000 W
0-10 V Control Ports

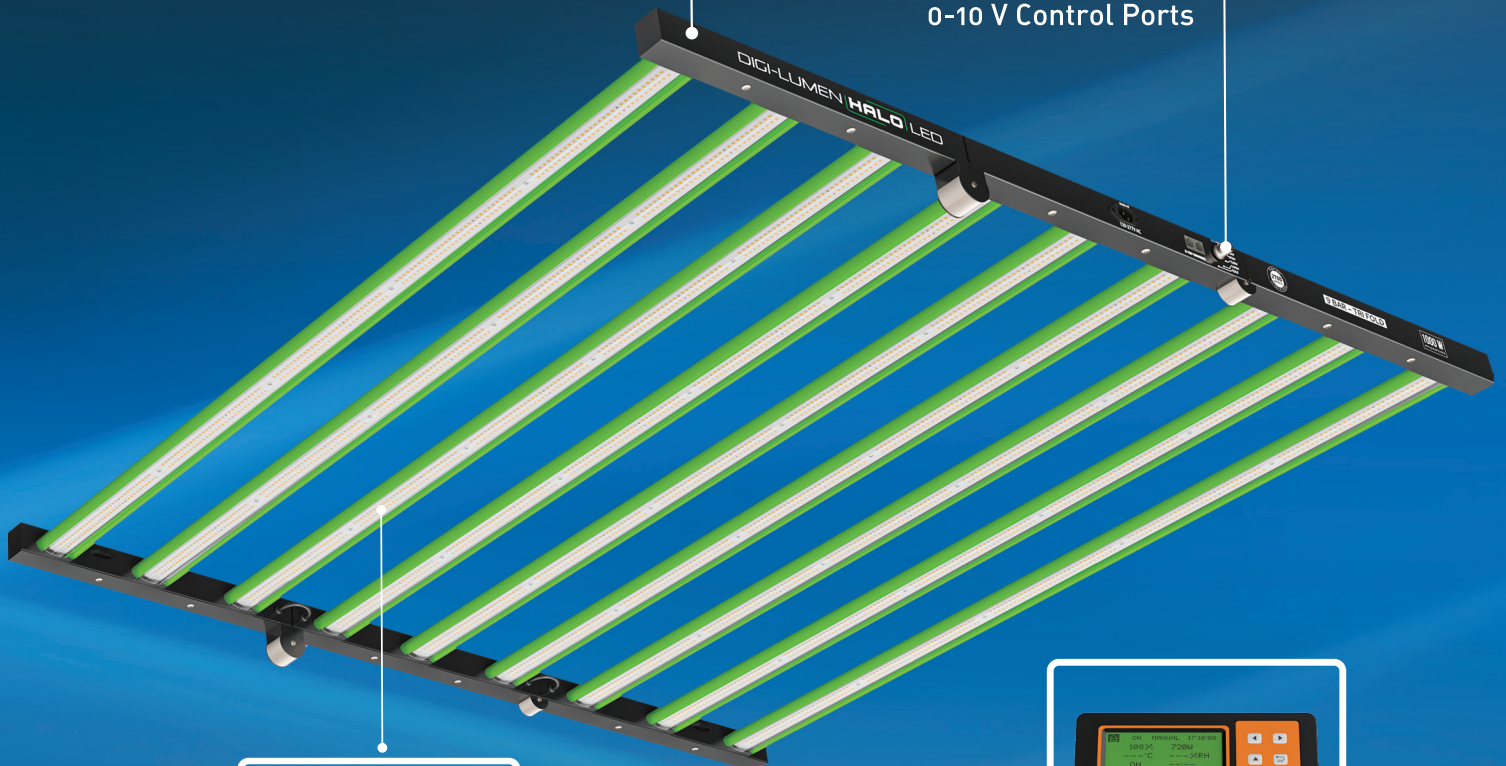

Polycarbonate Cover
Protects LED chips from
humidity & moisture



Daisy chain control
up to 30 fixtures with
ECO Smart controller
(sold separately)



9 BAR - TRI FOLD
400 W/600 W/800 W/1000 W

digilumen.com.au

OUTPUT SPECIFICATIONS

Maximum PPF @ 1000 Watts	2700 $\mu\text{mol/s}$
PPF Efficacy	2.7 $\mu\text{mol/J}$
Output PPF ($\mu\text{mol/m}^2/\text{s}$)	1360 @ 30cm

TECHNICAL SPECIFICATIONS

Model:	HALO 1000 W – 9 Bar Tri Fold
Light Source:	2988 x Single Mount LED
Input Voltage:	220 V-240 V AC
Frequency Range:	50-60 Hz
Power/Watts:	1000 W (max output)
Amps	4.17 A
Net Weight:	15 kg
Light Beam Angle:	120 Degrees
Body Case Material:	Die Cast Pressed Aluminum
IP Rating:	IP45 (water resistant)
Size:	L-1110 mm x W-1065 mm x H-70 mm
Lifespan:	→50,000 Hours
Min. Operating Temp:	-25°C
Max. Operating Temp:	40°C
Warranty:	2 Year Warranty

ASSEMBLY INSTRUCTIONS

Four rope ratchets are included for the mounting of this fixture. Install four eye bolts/screws to structurally secure ceiling points. Secure the rope ratchet hangers to the four mounting brackets. Adjust the rope ratchets to the required height.

4 x ROPE RATCHETS



DIGI-LUMEN **HALO** LED



9 BAR – TRI FOLD

1000 W
400 W/600 W/800 W/1000 W